

EXHAUST REGULATORS



**ACCESSORIES
MANUAL PNEUMATIC DISTRIBUTORS**

Exhaust regulators, directly assembled on pneumatic cylinders and valves connections, can regulate air compressed exhaust and its sound effect. The regulation can be done manually by knurled knob or screwing the head of the regulator. Available connections from 1/8" to 1/2". Nickel plated brass body with needle in OT 58.

TECHNICAL DATA

CONSTRUCTIVE FEATURES

Functions	Exhaust regulators
Body	Brass
Regulation needle	Brass
Seals	Nitrilic rubber NBR

TECHNICAL DATA


Fluid	Filtered air
Lubrication	With or without lubrication
Lubricant	Compatible with NBR (3°÷10° E) classe H

TECHNICAL FEATURES

Operating pressure	1 ÷ 10 bar
Temperature range	-10°C ÷ +60°C

RANGE


SCREWING HEAD

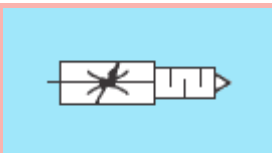	Symbol	Port	Model
EXHAUST REGULATOR		1/8"	SBRC8
		1/4"	SBRC4
		1/2"	SBRC2




KNURLED KNOB



	Symbol	Port	Model
EXHAUST REGULATOR MANUAL		1/8"	SBRM8
		1/4"	SBRM4
		1/2"	SBRM2


DIMENSIONS

SCREWING HEAD

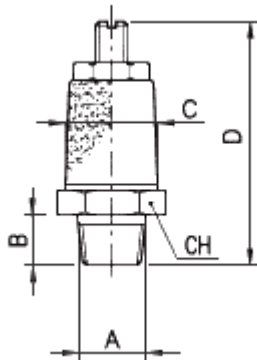

Ports	A	B	C	D	CH	Model
1/8"	1/8"	6,5	14	34	14	SBRC 8
1/4"	1/4"	9	16	41	16	SBRC 4
1/2"	1/2"	12	23	57	23	SBRC 2

KNURLED KNOB

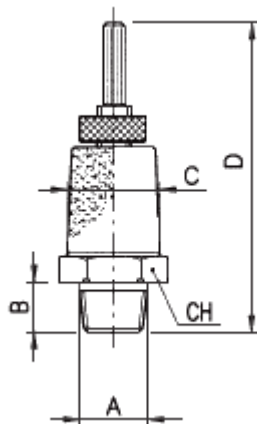

Ports	A	B	C	D	CH	Model
1/8"	1/8"	6,5	14	42	14	SBRM 8
1/4"	1/4"	9	16	51	16	SBRM 4
1/2"	1/2"	12	23	67	23	SBRM 2

